

TECHNICAL DATA SHEET





MATERIAL

DMX uses a specially formulated Polyethylene that provides a high environmental stress crack resistance to alkalines and acids found in the soil. In addition, DMX is made from 100% virgin resin. Our special extrusion process utilizes low heat and low shear to prevent heat degradation in the final product. The use of antioxidants and lubricants further ensure a smooth, superior quality membrane that outperforms the competition.

PROPERTIES

The DMX Drain 15X™ DOT drainage board finished product has a 10mm dimple height, providing a drainage capacity of 20 gal/min/ft of width and a compressive strength of 15,000lbs/sq ft. Polyethylene is highly resistant to chemical interaction and has a life expectancy of up to 50 years when properly installed in accordance with the manufacturer's instructions.

TECHNICAL DATA

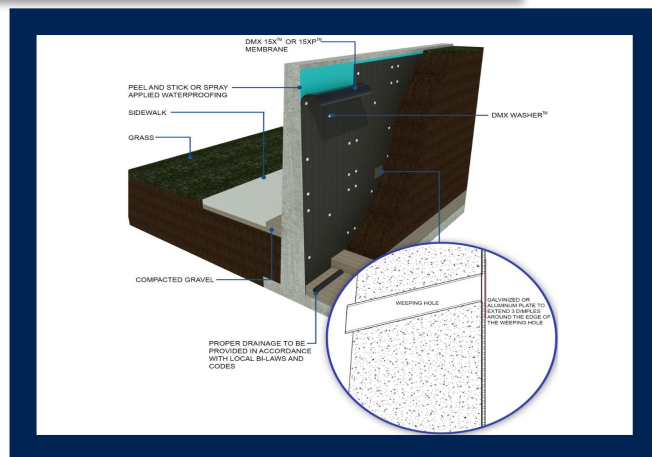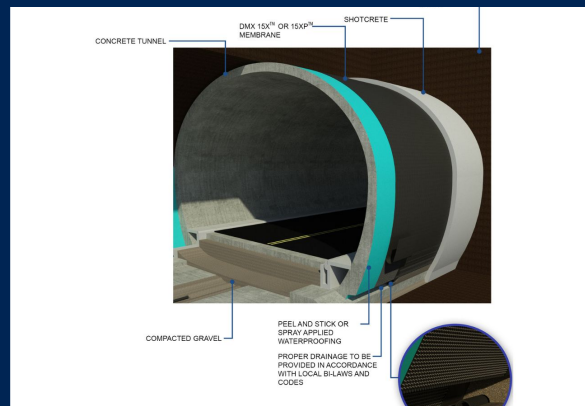

DRAINAGE CORE	TEST METHOD	IMPERIAL	METRIC
Colour	Black		
Dimensions (W x L)		4 x 50ft, 6 x 50ft	1.22 x 15.25m, 1.83 x 15.25m
Compressive Strength	ASTM D 1621	15000 psf (104 psi)	718 kNm ²
Thickness	ASTM D 1777	7/16 inch	10 mm
Material	Polyethylene		
FILTER FABRIC NON-WOVEN			
Grab Tensile Strength	ASTM D 4632	160 lbs	0.711 kN
Grab Elongation	ASTM D 4632	50%	50%
Trapezoid Tear Strength	ASTM D 4533	60 lbs	0.267 kN
CBR Puncture Resistance	ASTM D 6241	410 lbs	1.823 kN
Permittivity	ASTM D 4491	1.5 sec ⁻¹	1.5 sec ⁻¹
Water Flow	ASTM D 4491	110 gpm/ft ²	4480 l/min/m ²
Apparent Opening Size (AOS)	ASTM D 4751	70 Std. U.S. Sieve	0.212 mm
UV Resistance	ASTM D 4355	70%/500 hrs	70%/500 hrs
COMPOSITE SYSTEM			
Water Flow Rate (V)	ASTM D 4716	20 Gal/min/ft	248 L/min/m
Roll Size		4ft x 50ft, 6ft x 50ft	1.22m x 15.25m, 1.83m x 15.25m
Roll Weight		40 lbs, 55 lbs	18 kg, 25 kg
Fabric Weight		5lbs, 8 lbs	2.4kg, 3.6 kg